



Model 6011 | 6031

0.74KN AND 3.0KN SIDE MOUNT

- | Quick and simple mounting
- | Different finishes
- | Mount directly onto steel or concrete
- | For glass thicknesses between 12 - 31.52 mm
- | Drainage holes
- | Extension pin holes
- | Private, commercial and public areas

regal

BALUSTRADES

ONLEVEL distributed by:

TL-6011

0.74 kN Side Mount

Simply Minimal.

The TL-6011 U-profile is the intelligent solution for simple installations without screed onto steel or concrete. The profile can be used both in interior and exterior applications, withstands a linear load of 0.74 kN and is suitable for glass thicknesses between 12 mm and 21.52 mm.

Essential Features

- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Extension pin holes
- | Drainage holes
- | Top Cover (optional)
- | Cover cap (optional)
- | Integrated multifunctional sophisticated chamber
- | For glass thicknesses between 12 - 21.52 mm







bimobject

CAD IN EVERY FORMAT

TESTED
according to
BS6180

EN1090-1
EN1090-3
EXC 3

riba
product
selector

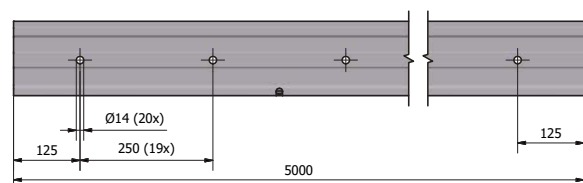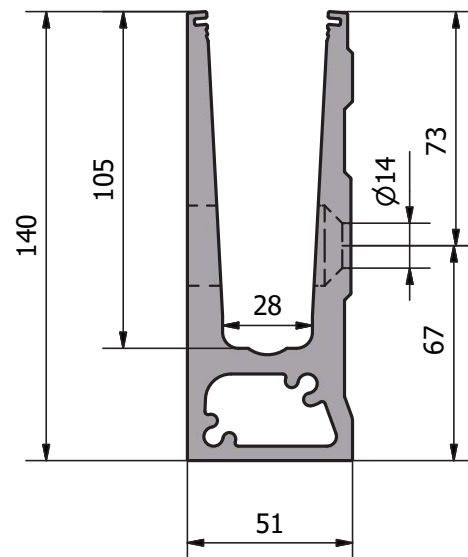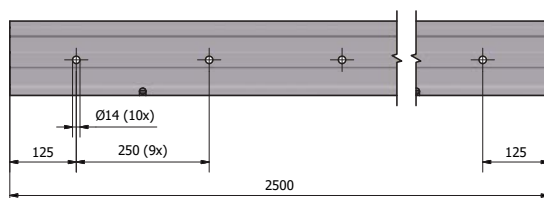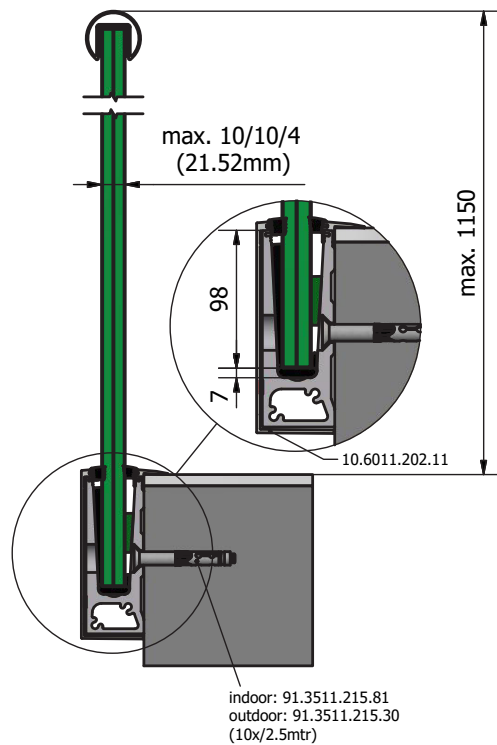



For simple installation without
screed onto steel or concrete



Side mount

Integrated multifunctional
sophisticated chamber for
enabling larger drilling distances

TL-6011 | 0.74 KN SIDE MOUNT

Glass profile




| Height: 140 mm
| Width 51 mm
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
2500	-	10.6011.002.11	-
5000	10.6011.005.10	10.6011.005.11	10.6011.005.13/16/18

Inside corner 90°



| Side length inside: 149 mm
| Side length outside: 200 mm
| Sales unit: 1 piece




Model 6011	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6011.300.10	10.6011.300.11	10.6011.300.13/16/18

Outside corner 90°



| Side length inside: 149 mm
| Side length outside: 200 mm
| Sales unit: 1 piece



Model 6011	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6011.350.10	10.6011.350.11	10.6011.350.13/16/18

Cover strip



| With mounting strips
| For use with a cover cap, end caps must be ordered separately.
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
2500	-	10.6011.202.11	-
5000	10.6011.205.10	10.6011.205.11	10.6011.205.13/16/18

TL-6011 | 0.74 KN SIDE MOUNT

Blanking plug



- | Required number per 2500 mm: 10 pieces
- | Sales unit: 10 pieces

Model 7000		Plastic
Colour	Diameter	Art. no.
white	25 mm	90.7000.025.40
black	25 mm	90.7000.025.41
grey	25 mm	90.7000.025.45

End cap without cover strip, left



- | For use on the left
- | Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6011.400.10	10.6011.400.11	10.6011.400.13/16/18

End cap without cover strip, right



- | For use on the right
- | Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6011.450.10	10.6011.450.11	10.6011.450.13/16/18

End cap without cover strip, left staircase



- | For use on the left
- | can be cut to size
- | Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6011.401.10	10.6011.401.11	10.6011.401.13/16/18

TL-6011 | 0.74 KN SIDE MOUNT

End cap without cover strip, right staircase



| For use on the right
| can be cut to size
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6011.451.10	10.6011.451.11	10.6011.451.13/16/18

End cap with cover strip, left



| For use on the left
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6011.410.10	10.6011.410.11	10.6011.410.13/16/18

End cap with cover strip, right



| For use on the right
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6011.460.10	10.6011.460.11	10.6011.460.13/16/18

End cap for staircase with cover strip, left



| For use on the left
| can be cut to size
| Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6011.411.10	10.6011.411.11	10.6011.411.13/16/18

TL-6011 | 0.74 KN SIDE MOUNT

End cap for staircase with cover strip, right



- | For use on the right
- | can be cut to size
- | Sales unit: 1 piece

Model 6011	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6011.461.10	10.6011.461.11	10.6011.461.13/16/18

Spacer



You do not have any drainage options on your balcony?!

So that you do not need to install a dam on your balcony, you can simply mount the spacers behind your profile.

- | Required number per 2500 mm: 10 pieces
- | Inner drill hole: Ø 14 mm
- | Sales unit: 10 pieces

Model 6011	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.6011.500.10	10.6011.500.11	10.6011.500.13/16/18

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 pieces

Model 7001	V4A (inside & outside)
	Art. no.
	90.7001.640.31

Fischer fixing anchor FH II 12/15 SK



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 10 pieces
- | Sales unit: 25 pieces

Model 3511	zinc-plated steel (inside)	V4A (exterior)
	Art. no.	Art. no.
	91.3511.215.81	91.3511.215.30

TL-6011 | 0.74 KN SIDE MOUNT

Fixing anchor steel



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 10 pieces
- | M10 x 40 mm
- | Sales unit: 10 pieces

Model 6011	zinc-plated steel (inside)	V4A (exterior)
	Art. no.	Art. no.
	91.6011.040.81	91.6011.040.30

Rampa fixing anchor for wood



- | Finish interior application: zinc-plated steel (inside)
- | Required number per 2500 mm: 10 pieces
- | M12
- | Sales unit: 10 pieces

Model 6011	zinc-plated steel (inside)
	Art. no.
	91.6011.800.81



FLEXFIT 1.0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 12 - 21.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis
- | Pay attention to the right glass thickness!


Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
12 mm	black	90.0502.112.00	90.0505.112.00	90.0525.112.00
6/6/2 (12.76 mm)	red	90.0502.113.00	90.0505.113.00	90.0525.113.00
6/6/4 (13.52 mm)	grey	90.0502.114.00	90.0505.114.00	90.0525.114.00
15 mm	yellow	90.0502.115.00	90.0505.115.00	90.0525.115.00
8/8/2 (16.76 mm)	brown	90.0502.117.00	90.0505.117.00	90.0525.117.00
8/8/4 (17.52 mm)	green	90.0502.118.00	90.0505.118.00	90.0525.118.00
19 mm	blue	90.0502.119.00	90.0505.119.00	90.0525.119.00
10/10/2 (20.76 mm)	red	90.0502.121.00	90.0505.121.00	90.0525.121.00
10/10/4 (21.52 mm)	green	90.0502.122.00	90.0505.122.00	90.0525.122.00

LARGER MOUNTING DISTANCES.

Mounting and Innovating.

They are written with capital letters and form part of our philosophy: We look at the product as a whole. Apart from safety and a classical, timeless design, ON**LEVEL** attaches special importance to assembly costs. We have achieved a continuous reduction of the number of anchors required for a glass support profile. Nevertheless, we have never lost sight of the necessary stability. Each anchor which is no longer required, does not need to be bought and thus saves you a drill hole, and the associated. We have developed an integrated **multifunctional sophisticated chamber** instead which combines exactly these features.

Pay attention to the logo indicating the suitable application types.

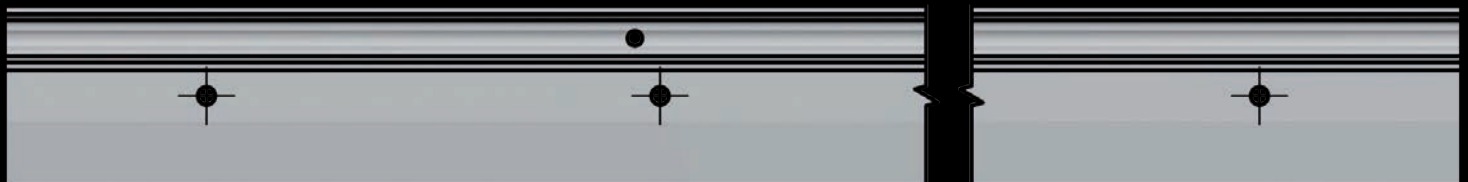

TL-6031

3.0 kN Side Mount

Big Brother.

The TL-6031 U-profile HD is an intelligent solution, especially for installations without screed onto steel or concrete.

As a matter of fact, the profile is suited both for interior and exterior applications. It can withstand a linear load of 3.0 kN and is appropriate for glass thicknesses between 21.52 mm and 31.52 mm. With TL-6031 you prove your farsightedness.

Essential Features

- | Slimline, elegant design and low-maintenance
- | ONLEVEL FLEXFIT Glass Adjustment Tool
- | Extension pin holes
- | Drainage holes
- | Top Cover (optional)
- | Integrated multifunctional sophisticated chamber
- | For glass thicknesses between 21.52 - 31.52 mm






bimobject[®]

CAD IN EVERY
FORMAT

TESTED
according to
BS6180

CE EN1090-1
EN1090-3
EXC 3

riba
product
selector

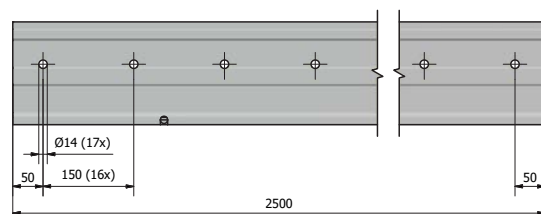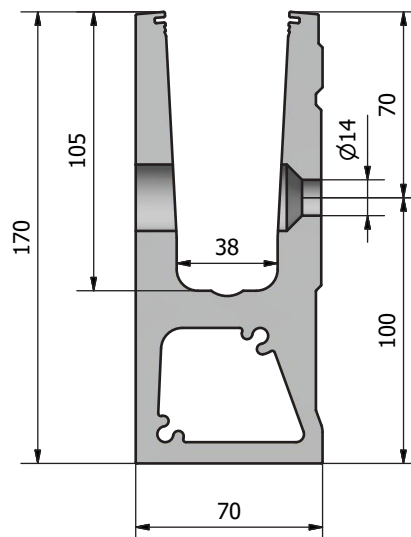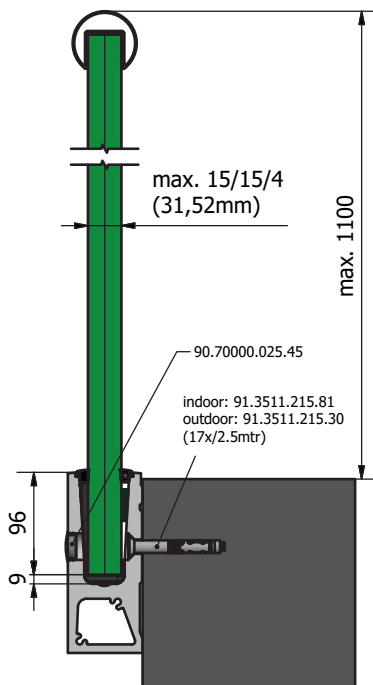



Mount directly onto steel
or concrete

Suitable for extreme
loads



Side mount

Integrated multifunctional
sophisticated chamber for
enabling larger drilling
distances

TL-6031 | 3.0 KN SIDE MOUNT

Glass profile




| Height: 170 mm
| Width 70 mm
| Sales unit: 1 piece

Model 6031	Plain aluminium
Length	Art. no.
2500	10.6031.002.11

Inside corner 90°



| Side length inside: 130 mm
| Side length outside: 200 mm
| Sales unit: 1 piece




Model 6031	Plain aluminium
	Art. no.
	10.6031.300.11

Outside corner 90°



| Side length inside: 130 mm
| Side length outside: 200 mm
| Sales unit: 1 piece



Model 6031	Plain aluminium
	Art. no.
	10.6031.350.11

End cap, left



| For use on the left
| Sales unit: 1 piece

Model 6031	Plain aluminium
Application	Art. no.
left	10.6031.400.11

TL-6031 | 3.0 KN SIDE MOUNT

End cap, right



| For use on the right
| Sales unit: 1 piece

Model 6031	Plain aluminium
Application	Art. no.
right	10.6031.450.11


End cap with cover strip, left



| For use on the left
| Sales unit: 1 piece

Model 6031	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.6031.410.10	10.6031.410.11	10.6031.410.13/16/18

End cap with cover strip, right

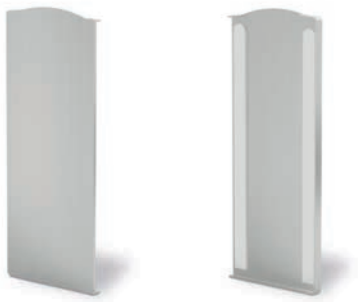

| For use on the right
| Sales unit: 1 piece

Model 6031	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.6031.460.10	10.6031.460.11	10.6031.460.13/16/18

Cover strip



| With mounting strips
| For use with a cover cap, end caps must be ordered separately.
| Sales unit: 1 piece

Model 6031	Mill finish	Plain aluminium
Length	Art. no.	Art. no.
5000	10.6031.205.10	10.6031.205.11

TL-6031 | 3.0 KN SIDE MOUNT

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 piece



Model 7001	V4A (inside & outside)
	Art. no.
	90.7001.640.31

Blanking plug

- | Required number per 2500 mm: 17 pieces
- | Sales unit: 10 pieces



Model 7000		Plastic
Colour	Diameter	Art. no.
white	25 mm	90.7000.025.40
black	25 mm	90.7000.025.41
grey	25 mm	90.7000.025.45

Fischer fixing anchor FH 12/15 SK



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 17 pieces
- | Sales unit: 25 pieces

Model 3511	zinc-plated steel (inside)	V4A (exterior)
	Art. no.	Art. no.
	91.3511.215.81	91.3511.215.30

Fixing anchor steel



- | Finish interior application: zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 17 pieces
- | M10 x 40mm
- | Sales unit: 17 pieces

Model 6031	zinc-plated steel (inside)	V4A (exterior)
	Art. no.	Art. no.
	91.6031.040.81	91.6031.040.30

TL-6031 | 3.0 KN SIDE MOUNT

Rampa fixing anchor for wood



- | Finish interior application: zinc-plated steel (inside)
- | Required number per 2500 mm: 17 pieces
- | M12
- | Sales unit: 17 pieces

Model 6031	zinc-plated steel (inside)
Art. no.	
91.6031.800.81	



FLEXFIT 3 .0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 21.52 - 31.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis
- | Pay attention to the right glass thickness!

Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
10/10/4 (21.52 mm)	blue	90.0502.322.00	90.0505.322.00	90.0525.322.00
12/12/4 (25.52 mm)	red	90.0502.326.00	90.0505.326.00	90.0525.326.00
15/15/4 (31.52 mm)	green	90.0502.332.00	90.0505.332.00	90.0525.332.00



Regal Balustrades Ltd

Unit 7, Eagles Wood Business Park,
Woodlands Lane, Bradley Stoke,
Bristol, BS32 4EU

T: +44 117 935 3888

E: sales@regalbalustrades.co.uk

www.regalbalustrades.co.uk